
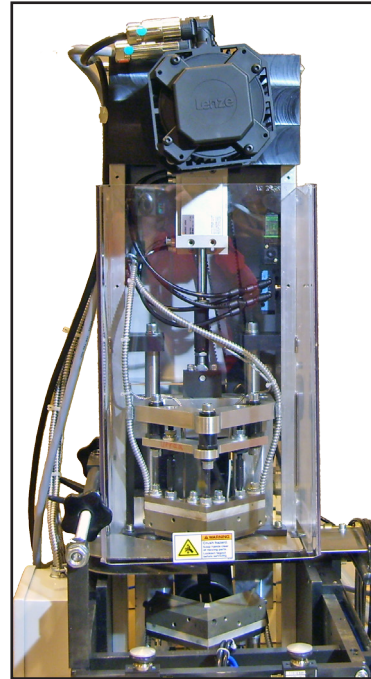


Round & Square Bottom Attachment

Attachments
Accessories
Upgrades

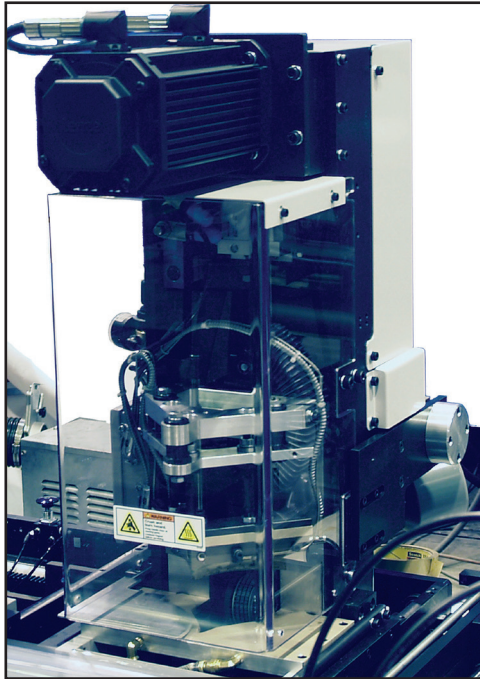

Key Features

Round & Square Bottom Attachment

- Round bottom: seal head radius: 80mm (3.14")
- Square bottom: gusset depth range: 20-60mm (3/4" - 2 1/4"), depending on material and speed.
- Driven pin pick-off scrap removal and vacuum slug collection.
- Real-time dwell adjustment.
- Servo actuated seal bars with independent heat control.
- Carriage mounted.
- Square bottom unit includes separator/cooling plate in gusset.
- Speeds of up to 300 cpm depending on film sealing characteristics, environment and operator skill. Speeds in excess of 200 cpm require servo driven anti-bounce roll on the bag machine.
- Optional electronic carriage registration available.
- Temperature controls located in the bag machine when ordered with machine. After-machine sale attachment would include separate control cabinet.



SYMACH

Streamfeeder

BPMC

EDMEYER

HUDSON-SHARP

Salwasser

